


**ADDENDUM No. 1**  
**TO THE**  
**CONTRACT DOCUMENTS**  
**FOR CONSTRUCTION OF**  
**2012 ROAD PROGRAM – SHERIDAN ROAD**  
**FOR THE**  
**TOWN OF MOULTONBOROUGH, NEW HAMPSHIRE**

**AUGUST 15, 2012**

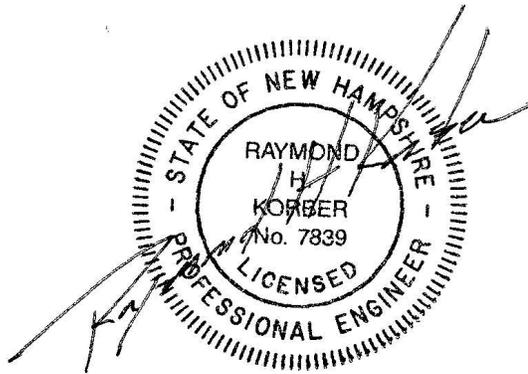

**This Addendum shall be included in and shall form a part of the Contract Documents dated July 2012. The items set forth herein, whether by omission, addition, substitution or other change are all included in and shall form a part of the proposed work and Bids submitted to the Owner. Clarifications and Questions and Answers are issued for the purpose of interpretation only and are not included in nor do they form a part of the Contract Documents.**

**Inclusion of this Addendum must be acknowledged by inserting the addendum number in the appropriate place in the Bid Form. Failure to acknowledge any and all addenda in the Bid Form as specified may be cause for rejection of the Bid by the Owner as a non-responsive Bid.**

**This Addendum consists of the following modifications to the Contract Documents:**

- 1. Pages AD1-1 through AD1-2**

---

ADDENDUM No. 1  
AD1-1

## QUESTIONS AND ANSWERS

- Q. Is the removal of large stumps to be paid for under the tree removal item?  
A. No, removal or grinding of large stumps is considered part of clearing and grubbing operations and is subsidiary to roadway reconstruction.
- Q. Is line stripping included in the pay items?  
A. No. Line stripping is not included in the scope of work. Line stripping will be completed by the Town.
- Q. Where are the water services located?  
A. There is only one water service included in the contract in the approximate location as shown on the Drawings. Note that the exact location is unknown. The Contractor is responsible for coordinating with the property owner Engineer and completing exploratory excavations to locate the water service. There is a pay item for exploratory excavations for this purpose.
- Q. Where does the transition occur from the proposed 18'-wide roadway to the existing 21-22'-wide roadway?  
A. Refer to the typical sections and cross sections.
- Q. What do we do about mailboxes?  
A. Mailboxes will have to be removed and reset. Relocation is subsidiary to roadway reconstruction.
- Q. What size trees are included under the tree removal pay item?  
A. The size to be included in the tree removal pay item is defined in the pay item description. Refer to Section 01200.
- Q. What is the expected treatment at the drives?  
A. Treatment at individual drives will be a field decision. The Town expects to install a 5' minimum paved apron at each drive. Milling at drives may be required to facilitate smooth transitions.

ADDENDUM No. 1  
AD1-2